
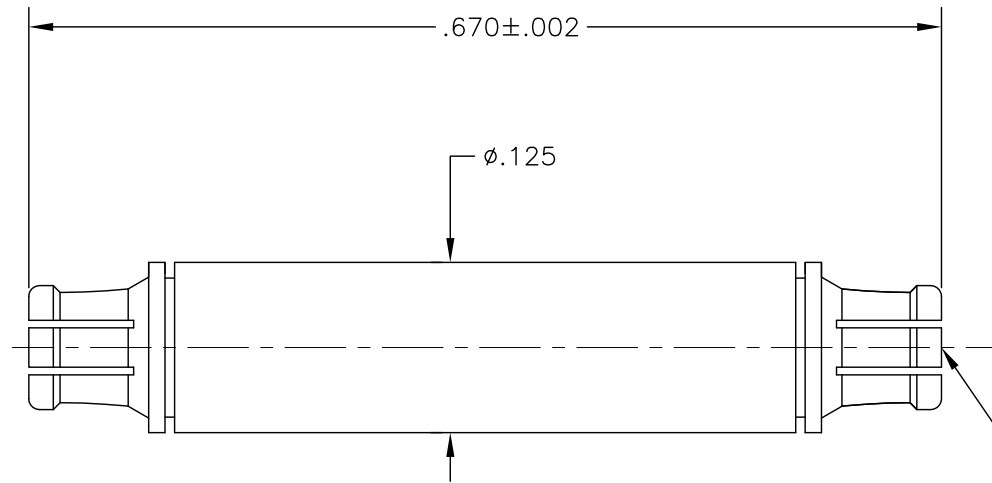




MSSP FEMALE  
(SMPM INTERFACE  
PER MIL-STD-348)

| COMPONENT      | MATERIAL & FINISH                             |  <b>MICRO-MODE PRODUCTS, INC.</b><br><i>The Reliable Connection to the Future</i> |                                      | El Cajon, CA 92020<br>ph 619.449.3844<br><a href="http://www.micromode.com">www.micromode.com</a> | CAGE CODE<br>15907 |
|----------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------|--------------------|
| BODY & CONTACT | BeCu, ASTM B196,<br>UNS C17300                | GOLD PLATE, MIL-DTL-45204,<br>TYPE 1, GRADE C, CLASS 1                                                                                                                 | ASSY PROCEDURES: N/A                 | MSSP FEMALE<br>BLINDMATE INTERCONNECT (.670 OAL)                                                  |                    |
| INSULATOR      | PTFE, ASTM D1710,<br>TYPE I, GRADE 1, CLASS A |                                                                                                                                                                        | INSERTION/EXTRACTION TOOL: MMTL-6460 |                                                                                                   |                    |
|                |                                               |                                                                                                                                                                        | SHEET 1 OF 1   OL12800 11-14-13 EB   | PART NO.<br><b>MSSP-12800</b>                                                                     | REVISION<br>—      |