


# OUTLINE DRAWING

MMP CABLE CA-16081-TAB#	CABLE LENGTH "L" (INCHES)
-001	3.00
-002	5.00
-003	6.00
-004	8.00



COMPONENT	MATERIAL & FINISH	
MSSS BODY, CABLE ADAPTER, & CONTACTS	BeCu, ASTM B196, UNS C17300	GOLD PLATE, MIL-G-45204, TYPE 1, GRADE C, CLASS 1
MSSS R/A BODY & SMA COUPLING NUT	303 CRES, ASTM A582	PASSIVATE, AMS-QQ-P-35
SMA BODY	303 CRES, ASTM A582	GOLD PLATE, MIL-G-45204, TYPE 1, GRADE C, CLASS 1
INSULATORS	PTFE, ASTM D1710, TYPE I, GRADE 1, CLASS A	
DIELECTRIC BEADS	ULTEM 1000, ASTM D5205	
HEAT SHRINK TUBING	POLYOLEFIN PER MIL-DTL-23053/5 CLASS 3	

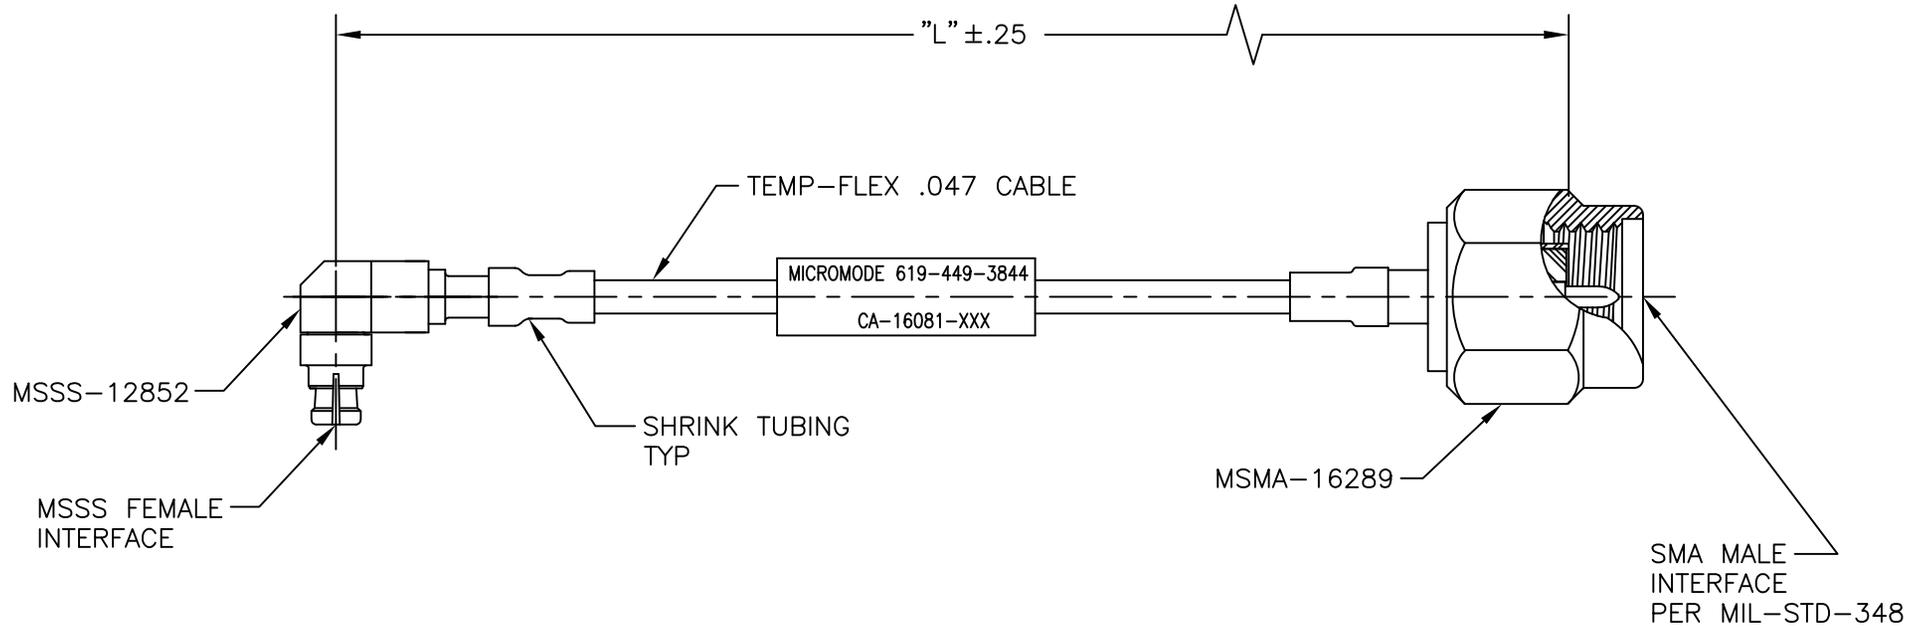

**MICRO-MODE PRODUCTS, INC.**  
*The Reliable Connection to the Future*

El Cajon, CA 92020  
ph 619.449.3844  
www.micromode.com

CAGE CODE  
15907

ASSY PROCEDURES: N/A

INSERTION/EXTRACTION TOOL: N/A

MSSS FEMALE TO SMA MALE  
TEMP-FLEX .047 CABLE

PART NO.

CA-16081

REVISION

C

SHEET 1 OF 1

6-28-17 SE MT

OUTLINE DRAWING