


OUTLINE DRAWING

PART NO. CA-8496

MMSP-2508
MMSP FEMALE
(SMP INTERFACE
PER MIL-STD-348)

1001-2-0800-000 XG
MSMA (M)
(SMA INTERFACE
PER MIL-STD-348)

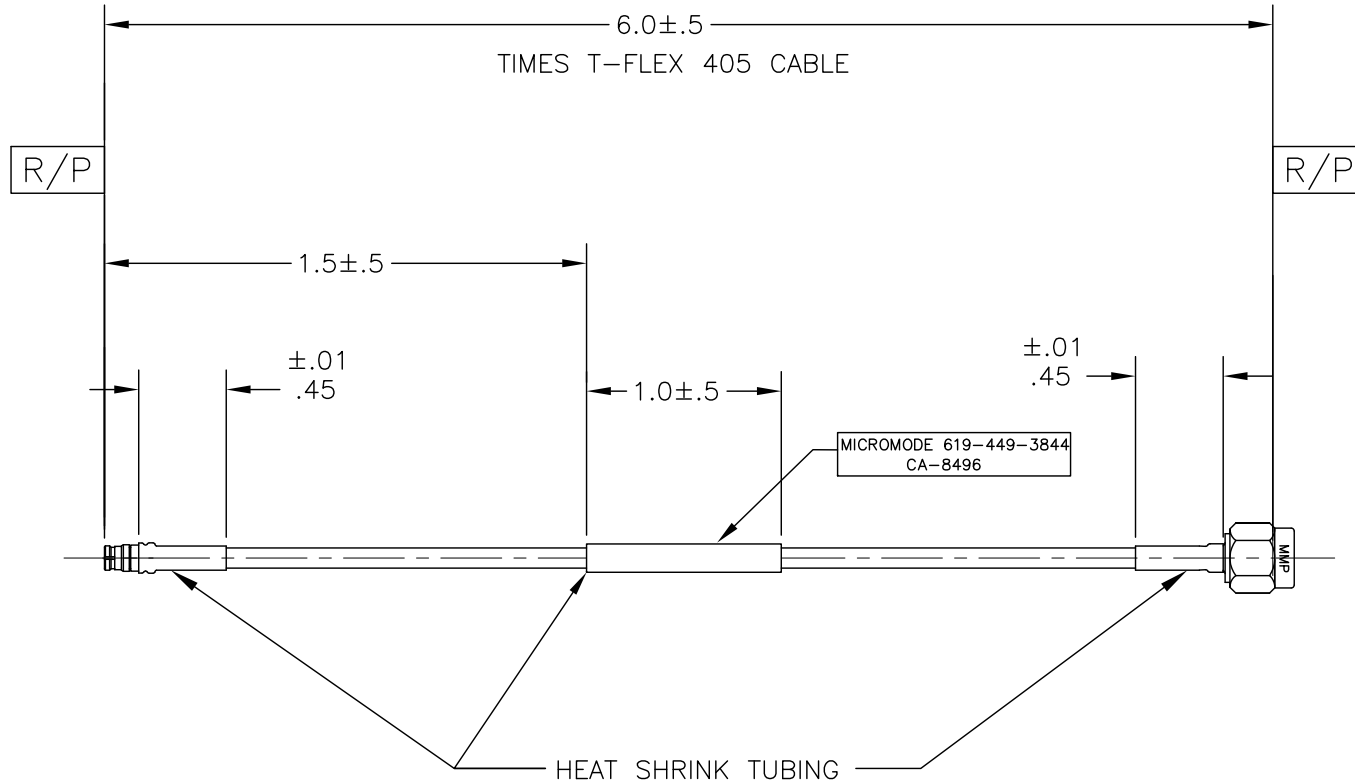

COMPONENT	MATERIAL & FINISH
MMSP BODY, CONTACTS, EMI & ANTI ROCK RINGS	BeCu, ASTM B196, UNS C17300 GOLD PLATE, MIL-C-45204, TYPE 1, GRADE C, CLASS 1
INSULATORS	PTFE, ASTM D1710, TYPE I, GRADE 1, CL A
SMA BODY, COUPLING NUT	303 CRES, ASTM A582 GOLD PLATE, MIL-C-45204, TYPE 1, GRADE C, CLASS 1
HEAT SHRINK TUBING	POLYOLEFIN MIL-DTL-23053/5 CL 1, BLK OR WHT
LOCKRING	BeCu, ASTM B196, UNS C17300
GASKET	SILICONE RUBBER, ZZ-R-765C



MICRO-MODE PRODUCTS, INC.
The Reliable Connection to the Future

El Cajon, CA 92020
ph 619.449.3844
www.micromode.com

CAGE CODE
15907

ASSY PROCEDURES: N/A

INSERTION/EXTRACTION TOOL: MMTL-2681

MMSP FEMALE TO SMA MALE
T-FLEX 405, 6.0 IN

PART NO.

CA-8496

REVISION

F

SHEET 1 OF 1 OL8496 6-21-06 MT EB

PART NO. CA-8496

OUTLINE DRAWING