



SMA MALE
INTERFACE
PER MIL-STD-348

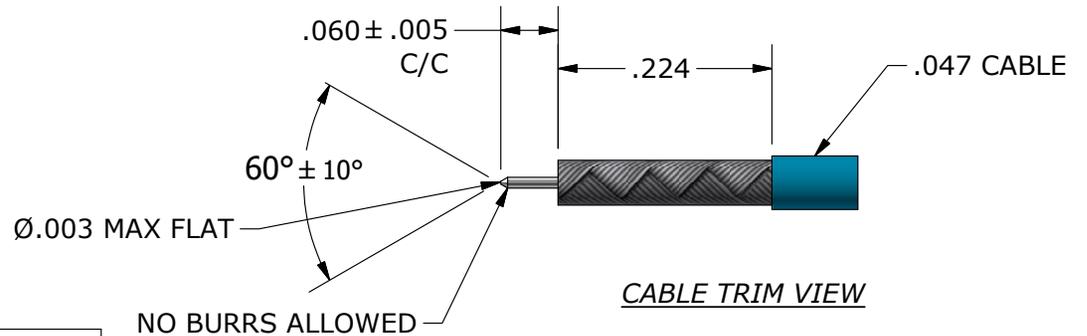

COMPONENT	MATERIAL	FINISH
BODY & CONTACT	BeCu, ASTM B196, UNS C17300	GOLD PLATE, MIL-DTL-45204, TYPE 1, GRADE C, CLASS 1
INSULATOR	PTFE PER ASTM D1710 TYPE 1, GRADE 1, CLASS A	
COUPLING NUT	303 CRES, ASTM A582	PASSIVATE, AMS-QQ-P-35
GASKET	SILICONE RUBBER, A-A-59588	
DIELECTRIC BEAD	TORLON (POLYAMIDE-IMIDE) MIL-P-46179A	

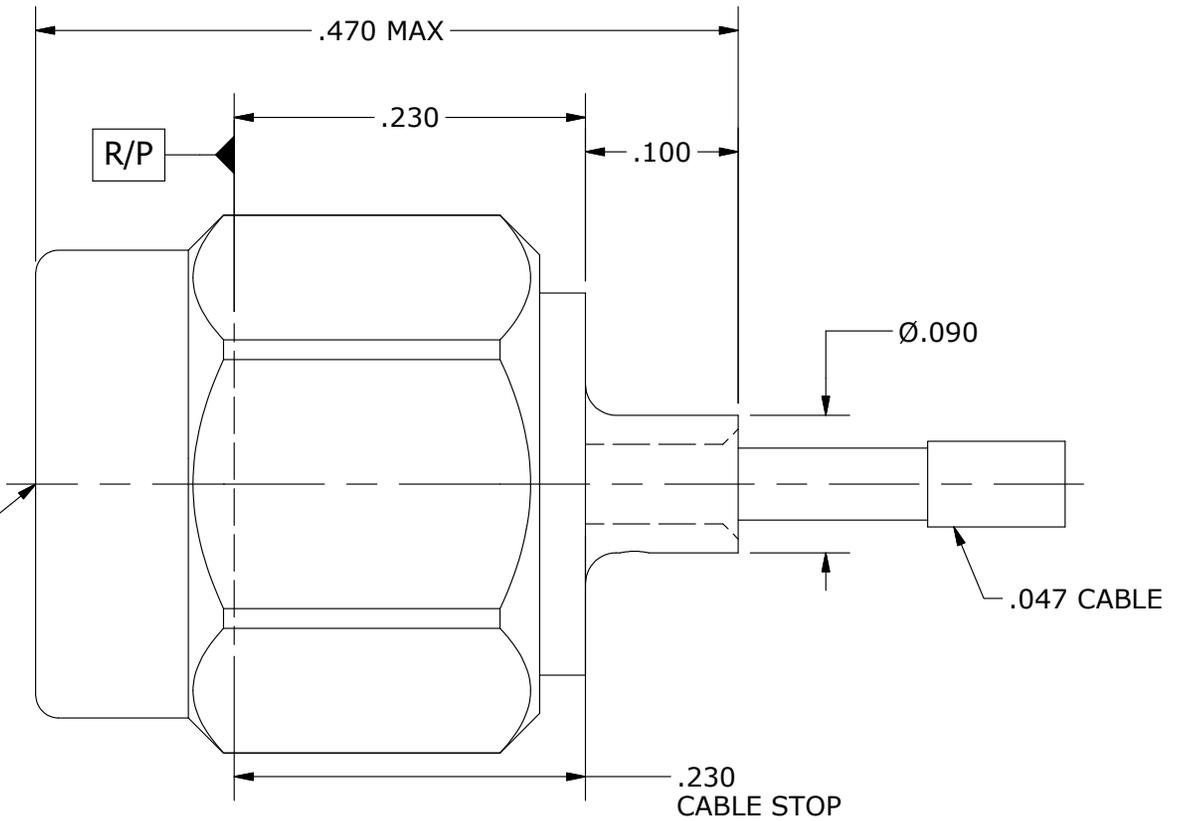

MICRO-MODE PRODUCTS, INC.
The Reliable Connection to the Future

El Cajon, CA 92020
ph 619.449.3844
www.micromode.com

CAGE CODE
15907

ASSEMBLY PROCEDURES: N/A

TOOL: N/A

SMA MALE TO .047 SR/FLEX CABLE

SHEET 1 OF 1 10-14-2024 EB

PART NO.
MSMA-16289

REVISION
B