# OUTLINE DRAWING | PART NO. CA–8866

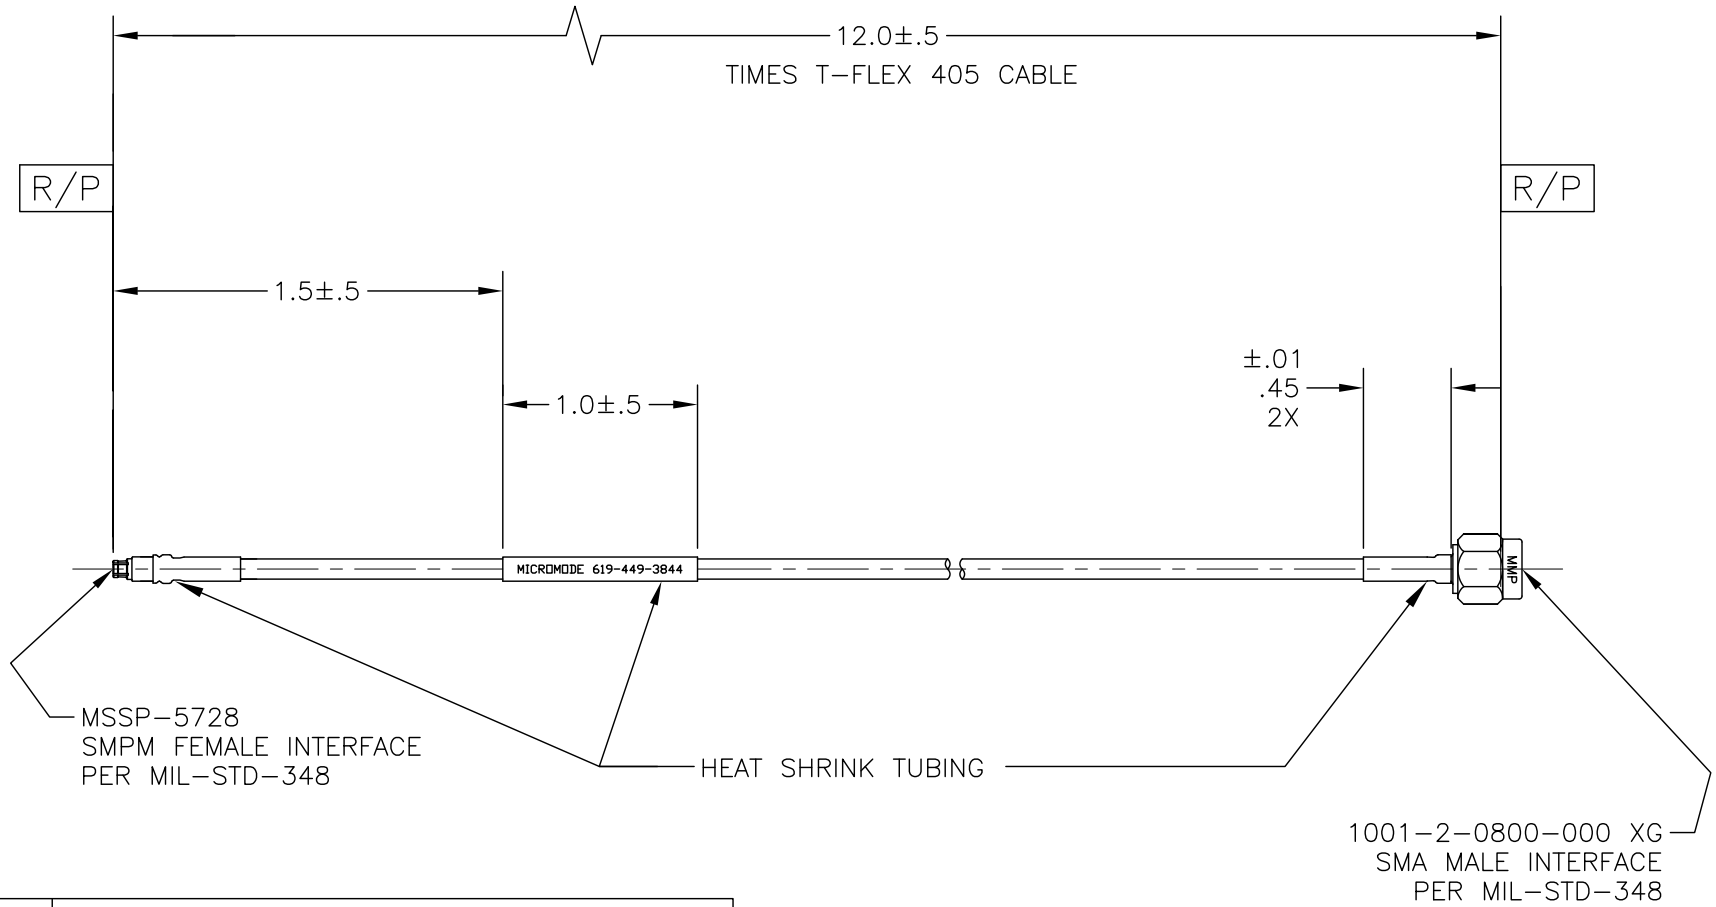


| COMPONENT | MATERIAL & FINISH | |
|---|---|---|
| MSSP BODY, CONTACTS | BeCu, ASTM B196, UNS C17300 | GOLD PLATE, MIL–G–45204, TYPE 1, GRADE C, CLASS 1 |
| INSULATORS | PTFE, ASTM D1710, TYPE I, GRADE 1, CL A | |
| BEAD | ULTEM 1000, ASTM D5205 | |
| SMA BODY | 303 CRES, ASTM A582 | GOLD PLATE, MIL–G–45204, TYPE 1, GRADE C, CLASS 1 |
| SMA COUPLING NUT | 303 CRES, ASTM A582 | PASSIVATE, AMS–QQ–P–35 |
| HEAT SHRINK TUBING | POLYOLEFIN MIL–DTL–23053/5 CL 1, BLK OR WH | |
| LOCKRING | BeCu, ASTM B196, UNS C17300 | |
| GASKET | SILICONE RUBBER, ZZ–R–765C | |


MICRO–MODE PRODUCTS, INC.
*The Reliable Connection to the Future*
El Cajon, CA 92020
ph 619.449.3844
www.micromode.com


CAGE CODE 15907

ASSY PROCEDURES: N/A

INSERTION/EXTRACTION TOOL: N/A

SMPM FEMALE TO SMA MALE
T–FLEX 405, 12.0 IN

PART NO. CA–8866

REVISION A

SHEET 1 OF 1 | OL8866 2–6–07 MD EB


PART NO. CA–8866 | OUTLINE DRAWING