


OUTLINE DRAWING

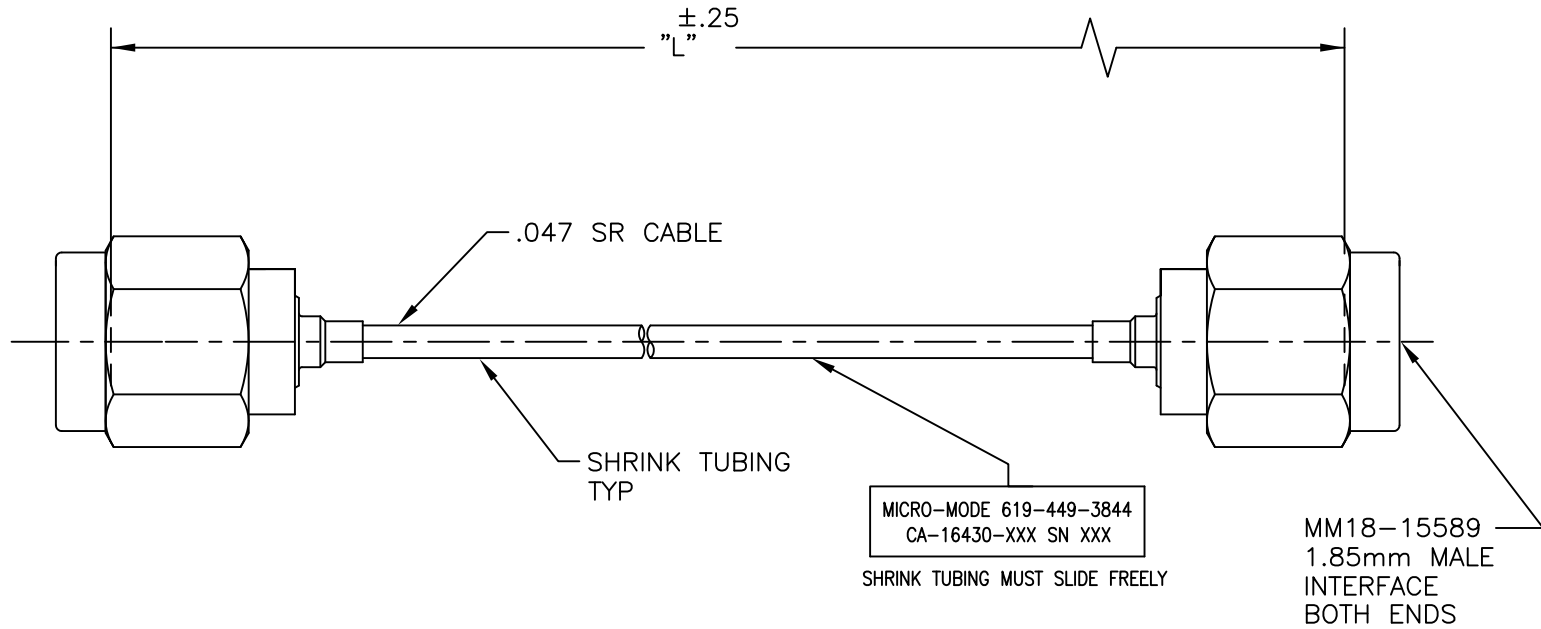

MMP CABLE CA-16430-XXX	CABLE LENGTH "L" (INCHES)
-001	4.0
-002	6.0
-003	8.0
-004	10.0
-005	12.0
-006	14.0
-007	16.0
-008	18.0
-009	20.0
-010	22.0

COMPONENT		MATERIAL & FINISH		MICRO-MODE PRODUCTS, INC. <i>The Reliable Connection to the Future</i>		El Cajon, CA 92020 ph 619.449.3844 www.micromode.com	CAGE CODE 15907
BODY & CONTACT	BeCu, ASTM B196, UNS C17300	GOLD PLATE, MIL-G-45204, TYPE 1, GRADE C, CLASS 1	ASSY PROCEDURES: N/A		1.8mm MALE TO 1.8mm MALE .047 SR CABLE		
INSULATOR	PTFE, ASTM D1710, TYPE I, GRADE 1, CLASS A		INSERTION/EXTRACTION TOOL: N/A				
COUPLING NUT	303 CRES, ASTM A582	PASSIVATE, AMS-QQ-P-35	PART NO.		CA-16430-TAB		
HEAT SHRINK TUBING	POLYOLEFIN MIL-DTL-23053/5, BLACK OR WHITE		SHEET 1 OF 1	11-6-17			

OUTLINE DRAWING