


OUTLINE DRAWING

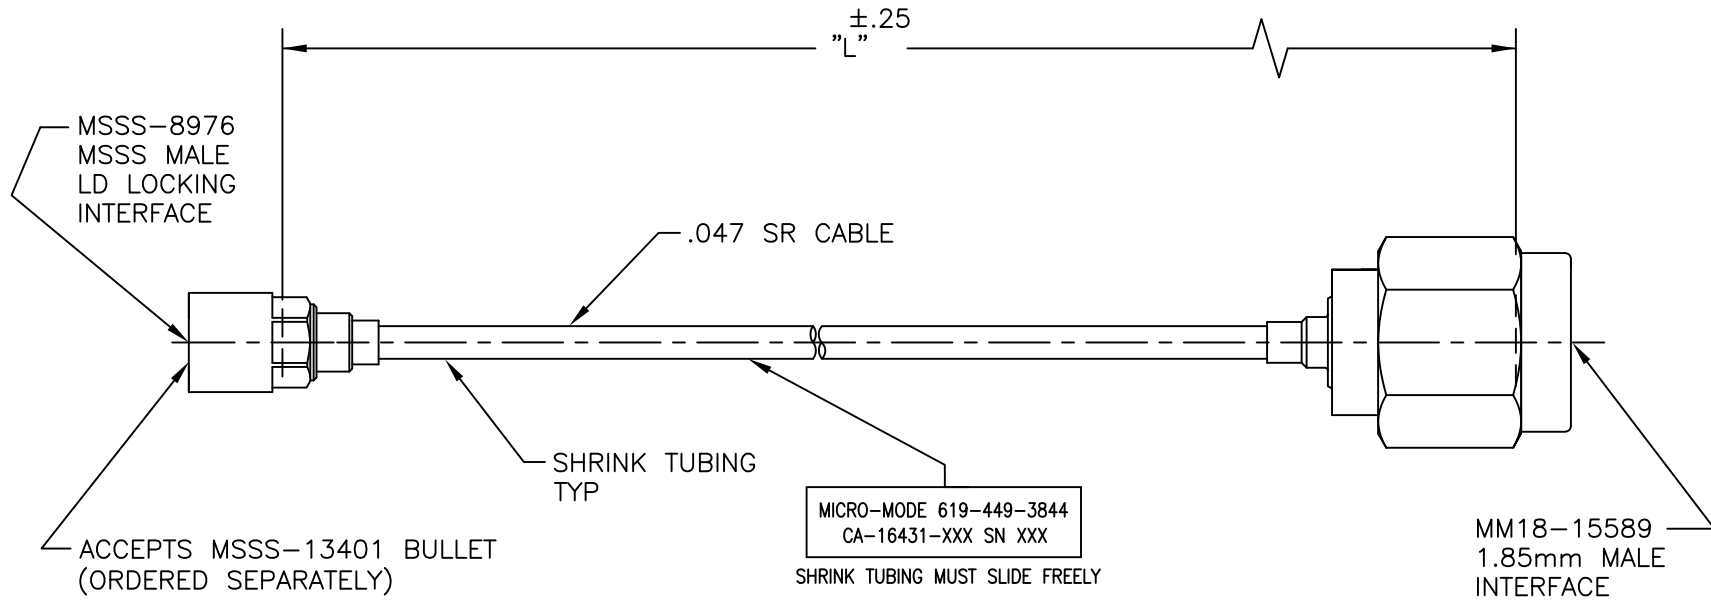

| MMP CABLE CA-16431-XXX | CABLE LENGTH "L" (INCHES) |
|---------------------------|------------------------------|
| -001 | 4.0 |
| -002 | 6.0 |
| -003 | 8.0 |
| -004 | 10.0 |
| -005 | 12.0 |
| -006 | 14.0 |
| -007 | 16.0 |
| -008 | 18.0 |
| -009 | 20.0 |
| -010 | 22.0 |

| | | | | | | | |
|--------------------|---|--|-----------------------------------|--|--|--|---------------------------|
| COMPONENT | | MATERIAL & FINISH | | MICRO-MODE PRODUCTS, INC. <i>The Reliable Connection to the Future</i> | | El Cajon, CA 92020 ph 619.449.3844 www.micromode.com | CAGE CODE 15907 |
| BODY & CONTACT | BeCu, ASTM B196, UNS C17300 | GOLD PLATE, MIL-C-45204, TYPE 1, GRADE C, CLASS 1 | ASSY PROCEDURES: N/A | | MSSS LD LOCKING TO 1.8mm MALE .047 SR CABLE | | |
| INSULATOR | PTFE, ASTM D1710, TYPE I, GRADE 1, CLASS A | | INSERTION/EXTRACTION TOOL: N/A | | | | |
| COUPLING NUT | 303 CRES, ASTM A582 | PASSIVATE, AMS-QQ-P-35 | SHEET 1 OF 1 11-6-17 MP | | PART NO. CA-16431-TAB | REVISION - | |
| HEAT SHRINK TUBING | POLYOLEFIN MIL-DTL-23053/5, BLACK OR WHITE | | | | | | |

OUTLINE DRAWING